


1	2	3	4
RevNo	Revision note	Date	Signature
			Checked

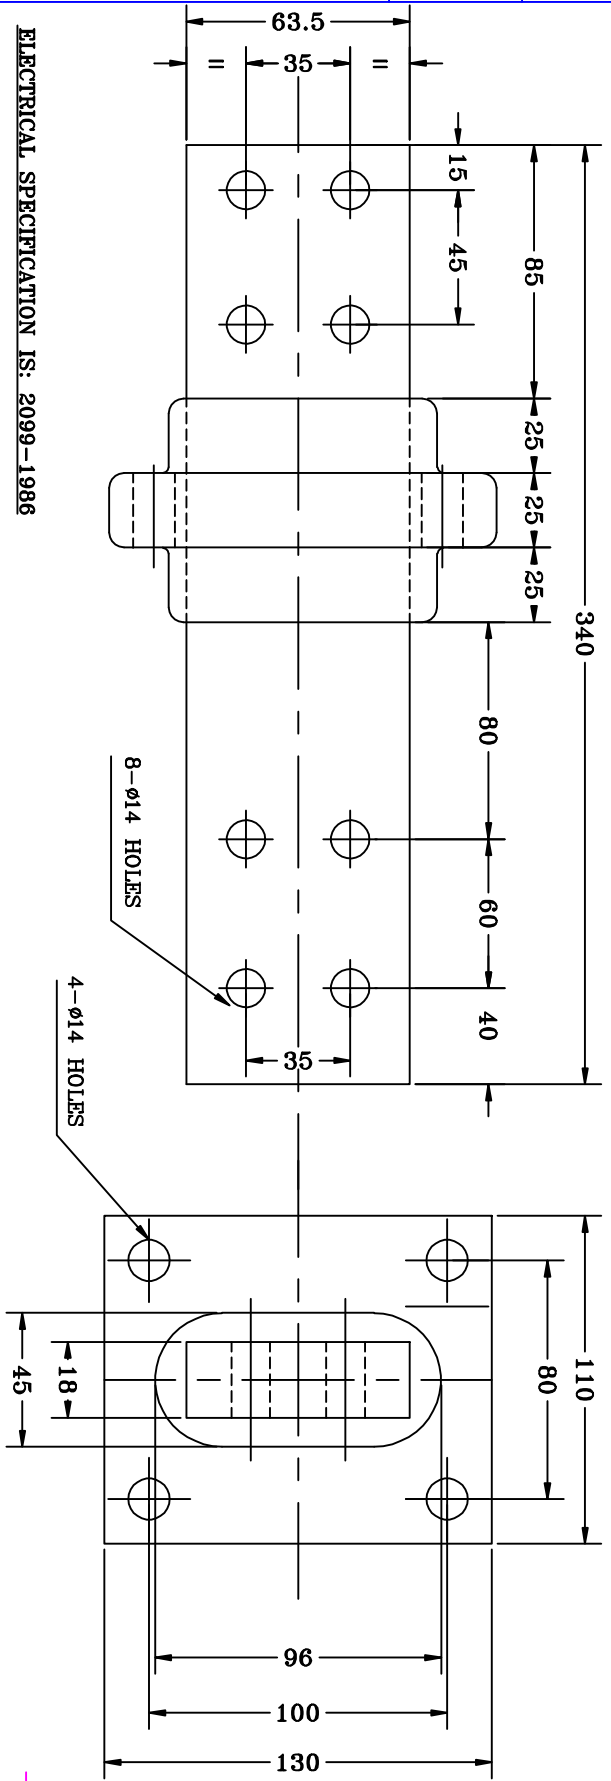

ELECTRICAL SPECIFICATION IS: 2099-1986

- 1 RATED VOLTAGE.....1.1KV
- 2 DRY POWER FREQUENCY WITHSTAND VOLTAGE (ONE MINUT)....5 KV
- 3 MAXIMUM CURRENT CAPACITY.....2000 AMP.
- 4 MINIMUM CREEPAGE DISTANCE.....25mm/Kv

NOTES:-

- 1 END COPPER PALM WILL BE ELECTRONNED 12 TO 15 MICRONS.
- 2 ELECTOLYTIC COPPER WITH HIGH ELECTRICAL CONDUCTIVITY.
- 3 COLOUR BRICK RED.
- 4 ALL DIMENSION ARE IN MM.

01	1.1 kv, 2000A	DISCRPTION		TYPE	THIRD ANGLE
		EPOXY RESINE CAST BUSHING			
		ITEM CODE: FF0097			
		DRAWING NO.: FFGP-044/08-09			
		DRN.	SIGN	DATE	
		CHD.	TANVI	08.04.08	
		APPD.	AP	-	
		Sheet Edition		REV	
		1/1		0	0



MANUFACTURER
Fibre & Fibre Glass Products
250/7, MAGAZINE HOUSE
G.I.D.C. MAKARPURA,
VADODARA - 390010

DRAWING NO.:
FFGP-044/08-09

Sheet Edition
1/1 0
REV
0

A B C D E F