


1	2	3	4
RevNo	Revision note	Date	Signature
			Checked

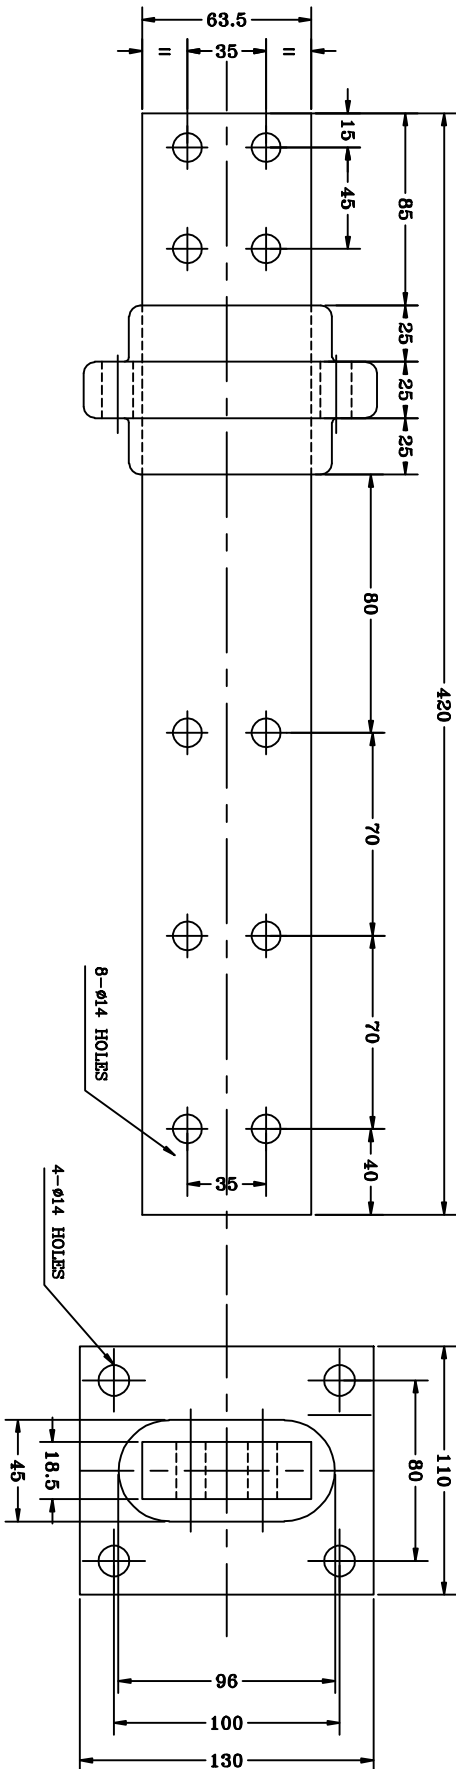

ELECTRICAL SPECIFICATION IS: 2099-1986

- 1 RATED VOLTAGE.....1.1KV
 - 2 DRY POWER FREQUENCY WITHSTAND VOLTAGE (ONE MINUT)...5 KV
 - 3 MAXIMUM CURRENT CAPACITY.....2000 AMP.
 - 4 MINIMUM GREPPAGE DISTANCE.....25mm/Kv
- NOTES:-
- 1 END COPPER PALT WILL BE ELECTRONNED 12 TO 15 MICRONS.
 - 2 ELECTOLYTIC COPPER WITH HIGH ELECTRICAL CONDUCTIVITY.
 - 3 COLOUR BRICK RED.
 - 4 ALL DIMENSION ARE IN MM.

01	1.1 kv, 2000A	DISCRPTION			
TYPE		EPOXY RESINE CAST BUSHING			
		ITEM CODE: FF0061			
		DRN.	SIGN	DATE	
		CHD.	TANVI	02.02.10	
		APPD.	AP	-	
MANUFACTURER		DRAWING NO.:			
Fibre & Fibre Glass Products		FFGP-046/08-09			
250/7, MAGAZINE HOUSE G.I.D.C. MAKARPURA, VADODARA - 380010		Sheet Edition		REV	
F		1/1		0	