


1	2	3	4
RevNo	Revision note	Date	Signature
			Checked

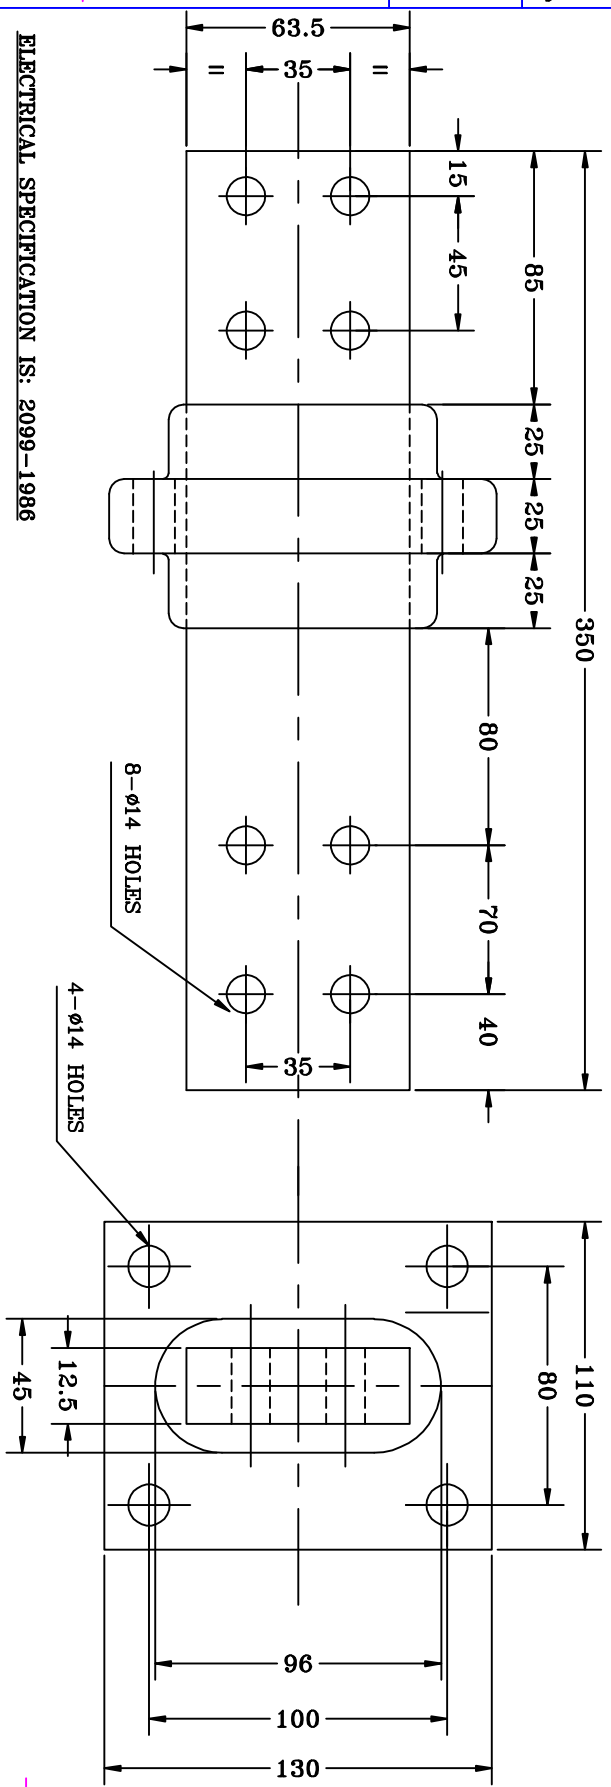

ELECTRICAL SPECIFICATION IS: 2099-1986

- 1 RATED VOLTAGE.....1.1KV
- 2 DRY POWER FREQUENCY WITHSTAND VOLTAGE (ONE MINUT)...5 KV
- 3 MAXIMUM CURRENT CAPACITY.....630 AMP.
- 4 MINIMUM CREEPAGE DISTANCE.....25mm/Kv

NOTES:-

- 1 END COPPER PALM WILL BE ELECTRONNED 12 TO 15 MICRONS.
- 2 ELECTOLYTIC COPPER WITH HIGH ELECTRICAL CONDUCTIVITY.
- 3 COLOUR BRICK RED.
- 4 ALL DIMENSION ARE IN MM.

01	1.1 kv, 630 AMP	DISCRPTION		TYPE	THIRD ANGLE
		EPOXY RESINE CAST BUSHING			
		ITEM CODE: FF0062			
		DRAWING NO.: FFGP-047/08-09		DRN.	SIGN
		MANUFACTURER		CHD.	DATE
		Fibre & Fibre Glass Products		APPD.	
		250/7, MAGAZINE HOUSE			
		G.I.D.C. MAKARPURA,			
		VADODARA - 380010			
		Sheet Edition			
		1/1			
		0			
		REV			
		0			

A B C D E F