


1	2	3	4
RevNo	Revision note	Date	Signature
			Checked

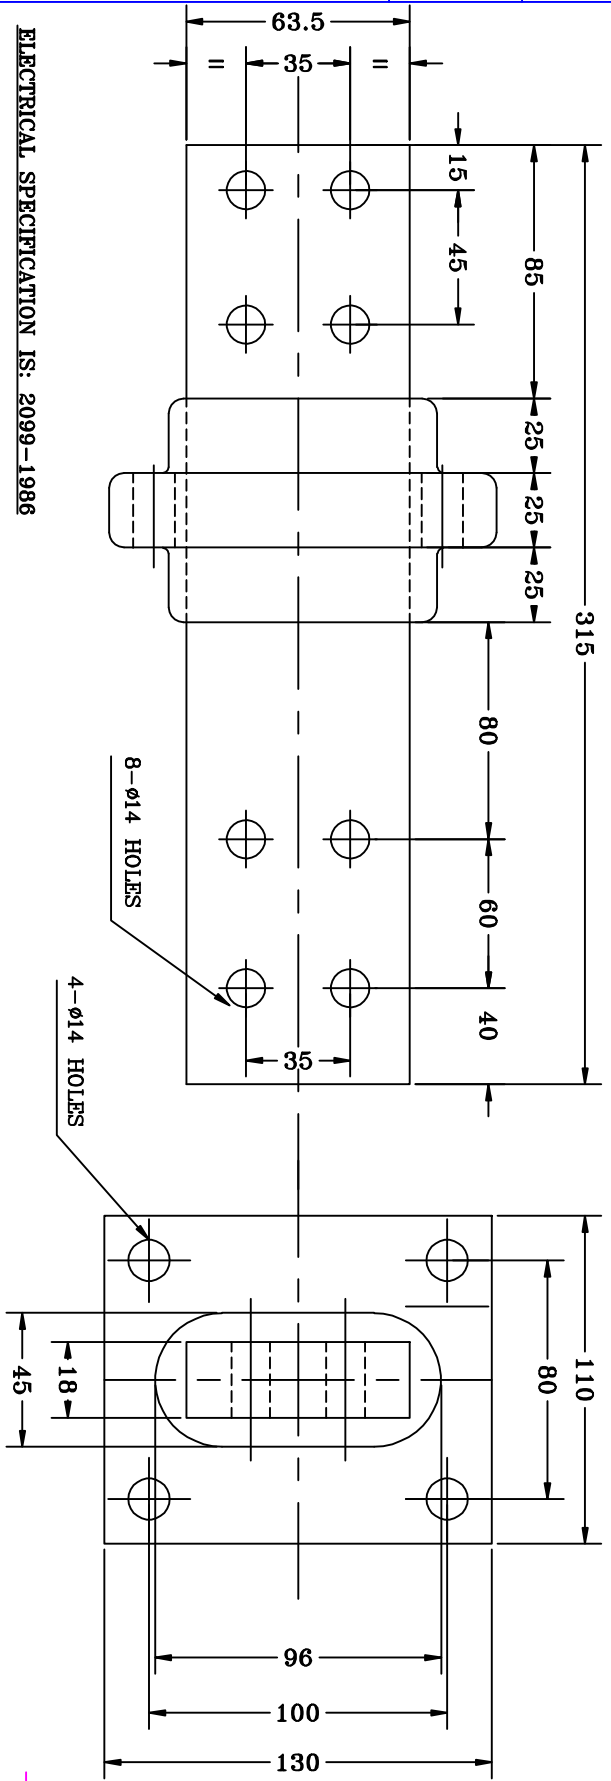

ELECTRICAL SPECIFICATION IS: 2099-1986

- 1 RATED VOLTAGE.....1.1KV
- 2 DRY POWER FREQUENCY WITHSTAND VOLTAGE (ONE MINUT)....5 KV
- 3 MAXIMUM CURRENT CAPACITY.....2150 AMP.
- 4 MINIMUM CREEPAGE DISTANCE.....25mm/Kv

NOTES:-

- 1 END COPPER PALM WILL BE ELECTRONNED 12 TO 15 MICRONS.
- 2 ELECTOLYTIC COPPER WITH HIGH ELECTRICAL CONDUCTIVITY.
- 3 COLOUR BRICK RED.
- 4 ALL DIMENSION ARE IN MM.

01	1.1 kv, 2150A/2000A	DISCRPTION						
TYPE		EPOXY RESINE CAST BUSHING		DRN.	SIGN	DATE		
		ITEM CODE: FF0101		CHD.	AP	10.03.10		
		MANUFACTURER		APPD.				
		Fibre & Fibre Glass Products		DRAWING NO.:		Sheet	Edition	REV
		250/7, MAGAZINE ROUSE		FFGP-049/10-11		1/1	0	0
		G.I.D.C. MAKARPURA,						
		VADODARA - 380010						

