


1	2	3	4
RevNo	Revision note	Date	Signature
			Checked

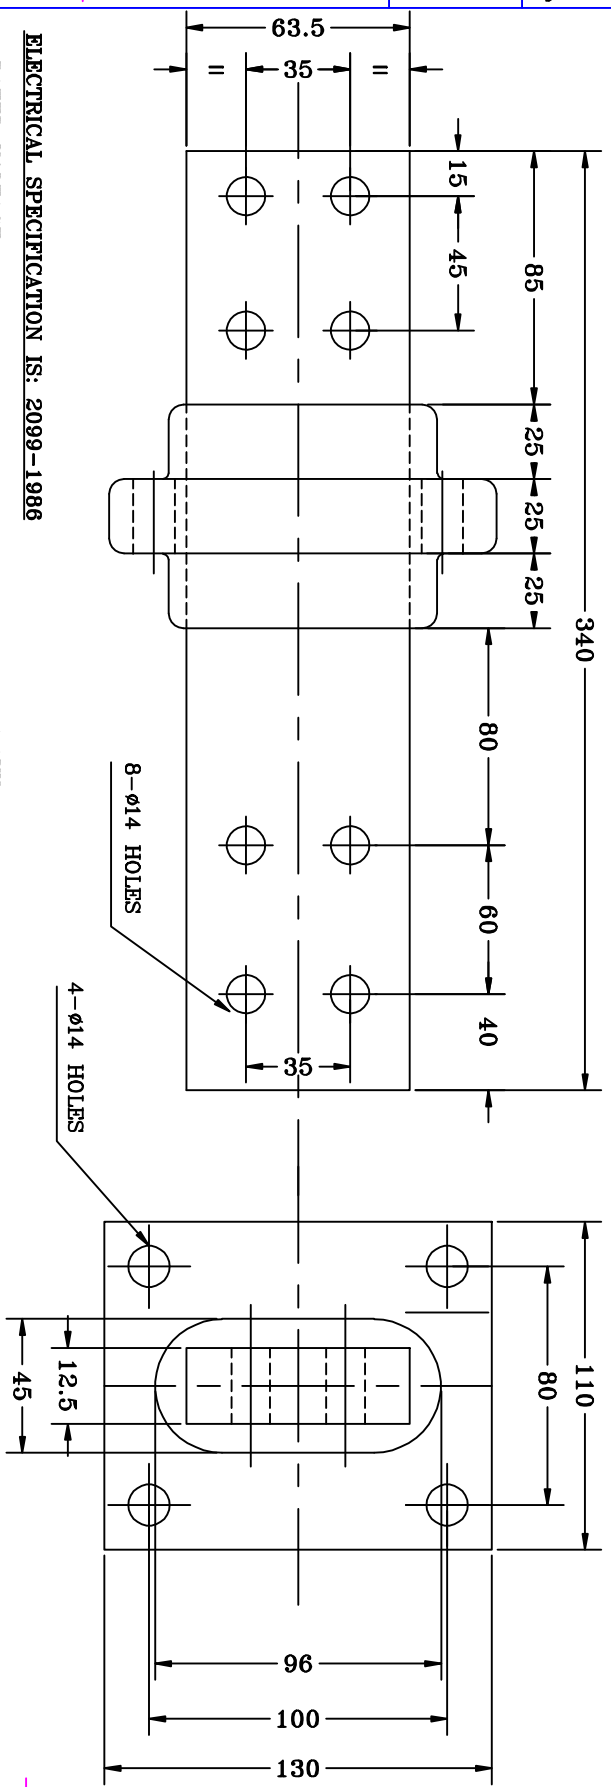

ELECTRICAL SPECIFICATION IS: 2099-1986

- 1 RATED VOLTAGE.....1.1KV
- 2 DRY POWER FREQUENCY WITHSTAND VOLTAGE (ONE MINUT)...5 KV
- 3 MAXIMUM CURRENT CAPACITY.....1000 AMP.
- 4 MINIMUM CREEPAGE DISTANCE.....25mm/Kv

NOTES:-

- 1 END COPPER PALM WILL BE ELECTRONNED 12 TO 15 MICRONS.
- 2 ELECTOLYTIC COPPER WITH HIGH ELECTRICAL CONDUCTIVITY.
- 3 COLOUR BRICK RED.
- 4 ALL DIMENSION ARE IN MM.

01	1.1 kv, 1000A	DISCRPTION			
TYPE		EPOXY RESINE CAST BUSHING			
		ITEM CODE: PF0066			
		DRAWING NO.:		SIGN DATE	
		FFGP-045/08-09		TANVI 22.04.08	
		APPD.		AP -	
		Sheet Edition		REV	
		1/1		0	
				0	



MANUFACTURER
Fibre & Fibre Glass Products
250/7, MAGAZINE HOUSE
G.I.D.C. MAKARPURA,
VADODARA - 380010

DRAWING NO.:

Sheet Edition

REV